

OPTIONS

<p>BATTERY PACKS</p> <p>BP-271 Rechargeable Li-ion 1150/1200 mAh (min./typ.) IP67 waterproof</p> <p>BP-272 Rechargeable Li-ion 1880/2000 mAh (min./typ.) IP67 waterproof</p>	<p>RAPID CHARGER</p> <p>BC-202IP2 BC-123S*1</p>	<p>MULTI-CHARGER</p> <p>BC-211 BC-157S</p>	<p>CIGARETTE LIGHTER CABLES (for use with BC-218)</p> <p>CP-22 With DC-DC converter (12-24 V DC)</p> <p>CP-23L For 12 V DC</p>	
<p>CHARGER CRADLE</p> <p>BC-218 Charger cradle with Bluetooth® function</p> <p>BC-207S</p> <p>HM-215 Speaker-microphone for BC-218</p> <p>MBA-7 Bracket Adaptor for BC-218</p> <p>MBF-1 Mounting Base</p>	<p>SPEAKER-MICROPHONES</p> <p>HM-183LS IPX7 waterproof</p> <p>HM-186LS</p>	<p>EARPHONE-MICROPHONES</p> <p>HM-153LS HM-166LS</p>	<p>HEADSETS</p> <p>HS-102*2 Earphone type</p> <p>HS-94*3 Earhook type</p> <p>HS-95*3 Behind-the-head type</p> <p>HS-97*3 Throat-microphone type</p> <p>VS-3 Bluetooth® headset</p>	<p>CARRYING CASES</p> <p>LC-183*4 For use with BP-271</p> <p>LC-185*4 For use with BP-272</p>

*1 BC-123SA for USA plug, SE for Europe plug, SV for Australia plug.

*2 OPC-2359 is required when using HS-102.
*3 Either OPC-2006LS or OPC-2328 is required when using any of these headsets. (Simplex mode operation only.)

SPECIFICATIONS

Network	4G bands: LTE B1, B3, B7, B8, B20 (EXP) LTE B2, B4, B5, B17 (USA)
	3G bands: W-CDMA B1, B8 (EXP) W-CDMA B2, B5 (USA)
Dimensions (W x H x D; Projections not included)	59 x 95 x 32 mm; 2.3 x 3.7 x 1.3 in (with BP-272)
Weight (approx.)	240 g; 8.5 oz (with BP-272 and antenna)
Voice Codec	G.726 (32 kbps)
AF output power	Internal SP 400 mW (16 Ω at 10% distortion) External SP 200 mW (8 Ω at 10% distortion)
Operating time (5:5:90 duty cycle.)	More than 17 hours (with BP-272)
Bluetooth	Ver 2.1 +EDR
GPS	Built-in
Operating temperature	-10 °C to +60 °C; +14 °F to +140 °F
IP rating	IP67/55/54

* Operating time may differ depending on operating environments.
All stated specifications are subject to change without notice or obligation.

Applicable U.S. Military Specifications

MIL 810G Standard	Method	Procedure
Low Pressure	500.5	I, II
High Temperature	501.5	I, II
Low Temperature	502.5	I, II
Temperature Shock	503.5	I-C
Solar Radiation	505.5	I
Rain Blowing/Drip	506.5	I, III
Dust Blowing	510.5	I
Immersion	512.5	I
Vibration	514.6	I
Shock	516.6	I, IV

Also meets equivalent MIL-STD-810-C, -D, -E and -F.

Supplied accessories

- BP-272 Li-ion battery pack
- MB-135 belt clip
- Hand strap
- Antenna

Please ask your Icom distributor in your country about the planned launch date of the service or other requirements. This product requires the system construction working in collaboration with a mobile network operator. Icom, Icom Inc. and the Icom logo are registered trademarks of Icom Incorporated (Japan) in Japan, the United States, the United Kingdom, Germany, France, Spain, Russia, Australia, New Zealand, and/or other countries. IDAS is a trademark of Icom Incorporated. The Bluetooth® word mark and logos are registered trademark owned by Bluetooth SIG, Inc. and any use of such marks by Icom Inc. is under license. All other trademarks are the properties of their respective holders.

Icom Inc. 1-1-32, Kamiminami, Hirano-Ku, Osaka 547-0003, Japan Phone: +81 (06) 6793 5302 Fax: +81 (06) 6793 0013 www.icom.co.jp/world Count on us!

<p>Icom America Inc. 12421 Willows Road NE, Kirkland, WA 98034, U.S.A. Phone: +1 (425) 454-8155 Fax: +1 (425) 454-1509 E-mail: sales@icomamerica.com URL: http://www.icomamerica.com</p>	<p>Icom (Europe) GmbH Communication Equipment Auf der Krautweide 24 65812 Bad Soden am Taunus, Germany Phone: +49 (6196) 76685-0 Fax: +49 (6196) 76685-50 E-mail: info@icomeurope.com URL: http://www.icomeurope.com</p>	<p>Icom France s.a.s. Zac de la Plaine, 1 Rue Brindejonc des Moulinais, BP 45804, 31505 Toulouse Cedex 5, France Phone: +33 (5) 61 36 03 03 Fax: +33 (5) 61 36 03 00 E-mail: icom@icom-france.com URL: http://www.icom-france.com</p>	<p>Your local distributor/dealer:</p>
<p>Icom Canada Glenwood Centre #150-6165 Highway 17A, Delta, B.C., V4K 5B8, Canada Phone: +1 (604) 952-4266 Fax: +1 (604) 952-0090 E-mail: info@icomcanada.com URL: http://www.icomcanada.com</p>	<p>Icom Spain S.L. Ctra. Rubi, No. 88 "Edificio Can Castanyer" Bajos A 08174, Sant Cugat del Valles, Barcelona, Spain Phone: +34 (93) 590 26 70 Fax: +34 (93) 589 04 46 E-mail: icom@icomspain.com URL: http://www.icomspain.com</p>	<p>Icom (Australia) Pty. Ltd. Unit 1 / 103 Garden Road, Clayton, VIC 3168 Australia Phone: +61 (03) 9549 7500 Fax: +61 (03) 9549 7505 E-mail: sales@icom.net.au URL: http://www.icom.net.au</p>	
<p>Icom Brazil Rua Itororó, 444 Padre Eustáquio Belo Horizonte MG, CEP: 30720-450, Brazil Phone: +55 (31) 3582 8847 Fax: +55 (31) 3582 8987 E-mail: sales@icombrazil.com</p>	<p>Icom (UK) Ltd. Blacksale House, Altira Park, Herne Bay, Kent, CT16 6GZ, U.K. Phone: +44 (0) 1227 741741 Fax: +44 (0) 1227 741742 E-mail: info@icomuk.co.uk URL: http://www.icomuk.co.uk</p>	<p>Shanghai Icom Ltd. No.101, Building 9, Caifuxingyuan Park, No.188 Maoting Road, Chedun Town, Songjiang District, Shanghai, 201611, China Phone: +86 (021) 6153 2768 Fax: +86 (021) 5765 9987 E-mail: bjcom@bjicom.com URL: http://www.bjicom.com</p>	

IP ADVANCED RADIO SYSTEM

LTE Transceiver

LTE (4G) and 3G



**Push-to-Talk Instant Communications
Communication throughout the Coverage Area of
LTE (4G) and 3G Network
Talk and Listen Simultaneously: Full-Duplex Conversation**

Instant Wide Area Coverage Over an LTE (4G) and 3G Network

The IP501H provides wide area communication using a LTE (4G) and 3G network and instantaneous communication. Individual calls, Group calls or All calls can be made the same way as a conventional two-way radio.



Actual Size

IP ADVANCED RADIO SYSTEM
IP501H



Communication throughout the Coverage of LTE (4G) and 3G Network

Using an existing LTE (4G) and 3G network, the IP501H is able to provide a network with wide area coverage capabilities. The IP501H does not require its own repeaters or IP network which reduces the cost of building and maintaining a wide area radio network.

* Service availability depends on the country. Network coverage provided by custom ICOM SIM card.

Full-Duplex Communication


The IP501H enables use of full-duplex communication which provides smooth telephone style conversations. The IP501H users can talk and receive at the same time.

Multiple User Communication

Multiple users in the call groups can initiate calls instantaneously. Removing the need to wait for available channels to communicate.

Priority Interrupt Calling

The IP501H supports group calls with three or more people. In case of an emergency, you can break into an on-going call to transmit an important message.

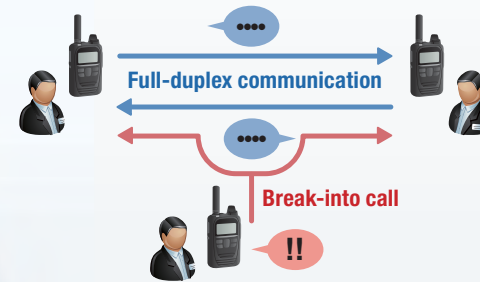

Industry Leading Compact and Lightweight Body

Compact 59 x 95 x 32 mm; 2.3 x 3.7 x 1.3 in and 240 g; 8.5 oz (approximate) lightweight body* allows non-intrusive mobility and use.

* With BP-272 battery pack and antenna. Projections are not included.

IP67 Dust-Tight and Waterproof

The IP501H has been designed to preserve its waterproof integrity in water of a depth of 1 meter for 30 minutes. It can be used for outdoor work or places prone to get wet.



Optional Charger Cradle With Bluetooth® Function

When the optional BC-218, charger cradle and HM-215, speaker-microphone is used, calls can be made with the microphone, while charging the IP501H. Even when the IP501H is not dropped into the BC-218, the Bluetooth® function enables you to wirelessly use the speaker-microphone.



* May not be available in some countries. Please confirm the regulations in your country before you use.

Other Features


- High quality, clear audio using G.726 Vocoder
- Individual, Group, Talkgroup, Multiplex Talkgroup and All calls
- Emergency button, Lone Worker and Man Down functions
- Vibration alert function notifies of incoming call
- Text message reception and preprogrammed message transmission
- Up to 500 memory address book (including Group, Individual, Talkgroup and Telephone lists)
- Voice message recording
- Built-in Bluetooth® and GPS*

* Gateway device required for GPS data (future).

Interconnect between IDAS™ and IP100H systems

With a gateway device*, the IP501H system will provide interoperability with an IP phone, analogue transceiver, IDAS™ digital transceiver and IP100H wireless LAN network systems in the future. In addition, GPS position data can be obtained from the IP501H transceiver.

* The gateway device will be available in the future.

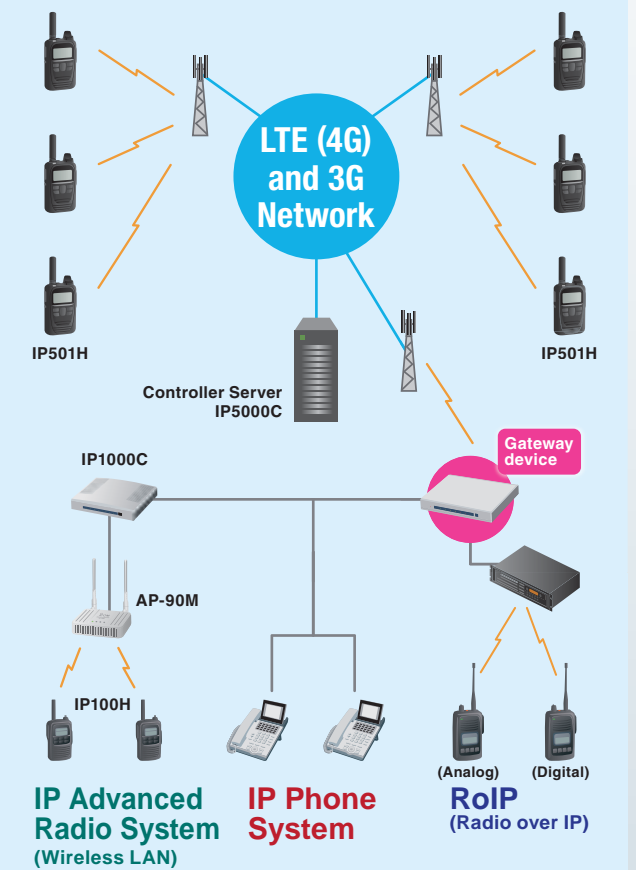

Railways



Security



Event Management



Road Maintenance



Hospitality



Transportation